



Proiettori da incasso / superficie

Semi-recessed
surface spotlights

L'eleganza in proiezione

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

Versatile elegance

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Using replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.

Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.

Corpo in pressofusione di alluminio verniciato poliestere. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW).
Lenti sostituibili in PMMA.
Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera.
(per Miniperfetto - R)


Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams).
Replaceable PMMA lenses.
Integrated snoot.

Joint in chromed metal on white finish, or in brass on black finish.
(for Miniperfetto - R)




MINIPERFETTO BASE

semi-recessed / surface – interior –

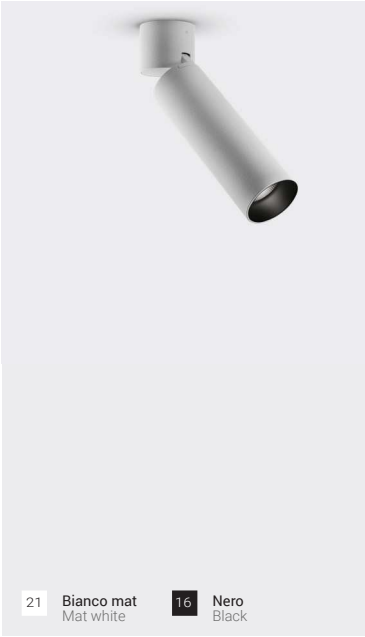

Codice Code	LED Lumen	Product Lumen	Watt	Colour T (K)	CRI	Fascio Beam
Driver integrato Integrated driver						
748-129	1170	972	9	3000	90	30°
748-129C	1100	915	9	2700	90	30°

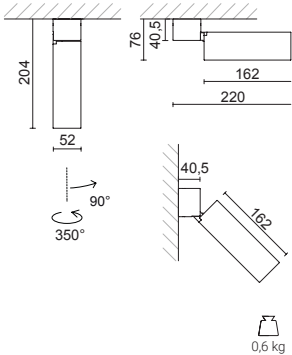

Regolabile sulla fase / Dimmable on the mains
220/240V - 50/60Hz



Accessori ottici intercambiabili
Replaceable optical accessories

		28-3901-51 Ottica professionale S Professional optic device S 9W 			28-3902-51 Ottica professionale M Professional optic device M 9W 			28-3903-51 Ottica professionale W Professional optic device W 9W
		28-3903-31 Ottica professionale XW Professional optic device XW 9W 			28-3979-100 Cilindro oro satinato Satinated gold baffle			
		28-4536-30 Frangiluce alveolare Honeycomb						