



Lito

design **Enrico Davide Bona** e **Elisa Nobile**

Gli innovativi proiettori per esterni Lito forniscono un'elevata potenza di luce, in abbinamento a dimensioni compatte e a un ridotto impatto visivo. Gli apparecchi sono progettati per LED COB di ultima generazione: dimensioni compatte e facilità di utilizzo li rendono ideali dove sia richiesta una luce d'accento ecologica anche in zone di passaggio. Possono essere applicati a parete oppure, tramite l'apposito picchetto in materiale termoplastico, nel terreno. È disponibile una versione con LED a tensione di rete regolabile sulla fase: Lito 230, caratterizzato da un design sobrio ed essenziale, crea scenografie luminose sia in spazi verdi sia su facciate, anche grazie alle ottiche professionali facilmente intercambiabili.

The innovative exterior projectors Lito are able to provide high luminous output, in combination with a compact size and a low visual impact. The projectors are engineered for COB LEDs of last generation: compact dimensions and user friendly application make them unobtrusive and ideal wherever an ecological accent lighting is needed also in passageways. They can be installed on the wall or in the ground through the thermoplastic spike provided for the purpose. A version with supply voltage LED dimmable on the mains is also available. Lito 230, featuring a sober and essential design, is ideal to set up light scenes both in gardens and on facades, also thanks to the easily replaceable professional optics.



Materiali:

- Corpo in pressofusione di alluminio, con speciale pretrattamento antiossidante e verniciatura poliestere stabilizzata ai raggi UV
- Ottiche professionali in termoplastico metallizzato a specchio
- Schermo in materiale termoplastico trasparente ad alta resistenza, UV protetto (dove previsto)
- Mascherina in termoplastico testurizzato (dove previsto)
- Picchetto in termoplastico
- Staffa di fissaggio e viti in acciaio inox
- Pressacavo M12,5 in ottone nichelato, completo di 2 mt di cavo H05RN-F
- Guarnizioni siliconiche

Materials:


- Body in die-cast aluminium with a special anti-oxidizing pretreatment. The polyester painting is stabilized to UV rays
- Professional optics in mirror-metallized thermoplastic material
- Screen in UV resistant, clear thermoplastic material (where applicable)
- Textured thermoplastic cover (where applicable)
- Thermoplastic ground-spike
- Bracket and screws in stainless steel
- M12,5 cable-gland in nickel-plated brass, complete with 2mt H05RN-F cable
- Silicone gaskets




Codice Code	Colore Colour	LED Lumen	Product Lumen	Watt	Colour T (K)	CRI	Fascio Beam
11200030	Nero/Black	1800	1486	12	3000	85	30°
11200085	Metal/Silver	1800	1486	12	3000	85	30°

230/240V – 50/60Hz

CE 850° IP66 IK10

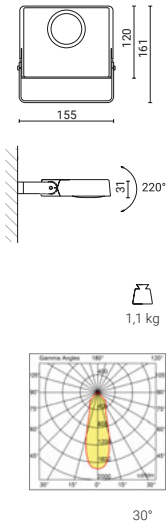

84108
Connettore stagno
Rated cable connector



163400
Staffa in acciaio inox 250 mm
Stainless steel bracket 250 mm