



Proiettori da incasso / superficie

Semi-recessed
surface spotlights

L'eleganza in proiezione

Apparecchi versatili per applicazioni che danno vita a geometrie di luce e volumi nello spazio. Grazie ad accessori ottici intercambiabili, sono in grado di generare luce d'ambiente o d'accento illuminando gli ambienti interni con stile ed eleganza. Il design rigoroso consente applicazioni in qualsiasi tipologia di contesto indoor, armonizzando stile e funzionalità.

Versatile elegance

Versatile light fittings for surface mounted applications, that generate luminous geometries and volumes in the space. Using replaceable optical accessories, these fittings can both be used for general or accent lighting in any interior context combining functionality and elegant design. The rigorous design allows applications in any interior applications, harmonising style and functionality.



Sono pensati per accogliere sorgenti LED COB ad alta efficienza energetica, per un elevato comfort visivo e aperture ottiche differenziate.

Engineered to be equipped with high efficiency LED sources, for high visual comfort and several different beam options.


Corpo in pressofusione di alluminio verniciato poliestere. Ottiche professionali in termoplastico metallizzato a specchio (bianco per fasci XW).
Lenti sostituibili in PMMA.
Cilindro antiabbagliamento di serie.

Snodo in metallo cromato su finitura bianca oppure ottone su finitura nera.
(per Miniperfetto - R)

Body in die-cast aluminum, polyester painted. Professional optics in mirror metallized thermoplastic material (white for XW beams).
Replaceable PMMA lenses.
Integrated snoot.

Joint in chromed metal on white finish, or in brass on black finish.
(for Miniperfetto - R)



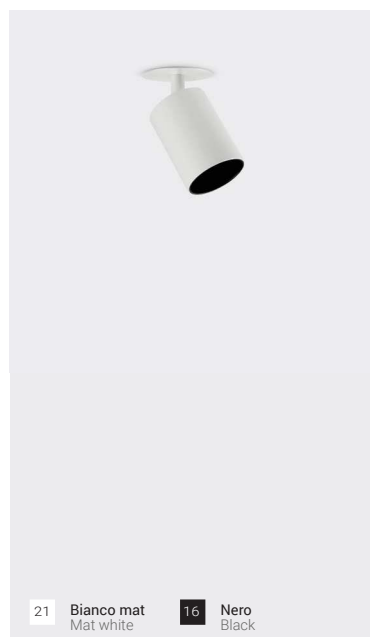

Codice Code	LED Lumen	Product Lumen	Watt	mA	Colour T (K)	CRI	Fascio Beam
----------------	--------------	------------------	------	----	-----------------	-----	----------------

Con vetro zigrinato e rosone per applicazione a incasso


With prismatic spread lens and canopy for recessed application

756-679BN	1080	756	9	250	3000	90	30°
	1500	1050	12	350			
	2051	1436	18	500			

756-679CN	1050	735	9	250	2700	90	30°
	1390	973	12	350			
	1946	1362	18	500			

Driver da ordinare separatamente
Drivers should be ordered separately

81-04009	Output 250mA
81-04010	Output 350mA Regolabile sul taglio di fase / Dimmable on the mains
81-04011	Output 500mA
81-04002	Output 500mA Dimmerabile DALI / DALI dimmable



Accessori ottici intercambiabili Replaceable optical accessories

		28-9001-51 Ottica professionale S Professional optic device S			28-9002-51 Ottica professionale M Professional optic device M			28-9003-51 Ottica professionale W Professional optic device W
		28-4139-100 Cilindro oro satinato Satinated gold baffle			28-4139-31 Cilindro bianco White baffle			28-4163-30 Frangiluce alveolare Honeycomb
		28-4073-61 Vetro sabbato (solo per 9W e 12W) Frosted glass (only for 9W e 12W)			28-4073-103 Vetro ellittico Elliptical spread lens			