

Serie Perfetto

Studio Tecnico Ivela

Gamma di proiettori compatti per binari elettrificati caratterizzata da linee semplici ed eleganti, progettata per ospitare i nuovi LED COB ad alta efficienza. La serie Perfetto è disponibile anche in versioni per binario monofase, con base per applicazioni a parete/soffitto, con LED a tensione di rete (230V) e con temperature di colore diverse. La disponibilità di differenti fasci luminosi, intercambiabili e sostituibili senza necessità di attrezzi, e l'orientamento del corpo fino a 350°, consentono molteplici soluzioni e regie luminose nel retail, in spazi commerciali, musei ed aree espositive.

Range of compact spotlights for electrified tracks, featuring simple and elegant lines, and equipped with the new high efficiency COB LEDs. Perfetto range is available also in versions for single-phase track, with a base for wall/ceiling applications, with 230V supply voltage LED and with different colour temperatures. It can be supplied with different light beams, interchangeable and easy to be replaced without tools. It can be adjusted up to 350°, allowing many light solutions for shops, stores, museums and exhibition areas.




Materials:

- Corpo e vano componenti
in pressofusione di alluminio
verniciato poliestere
- Ottiche professionali in termoplastico
metallizzato a specchio

Materials:

- Body and gear box in die-cast
aluminium, polyester painted
- Professional optics in mirror
metallized thermoplastic material



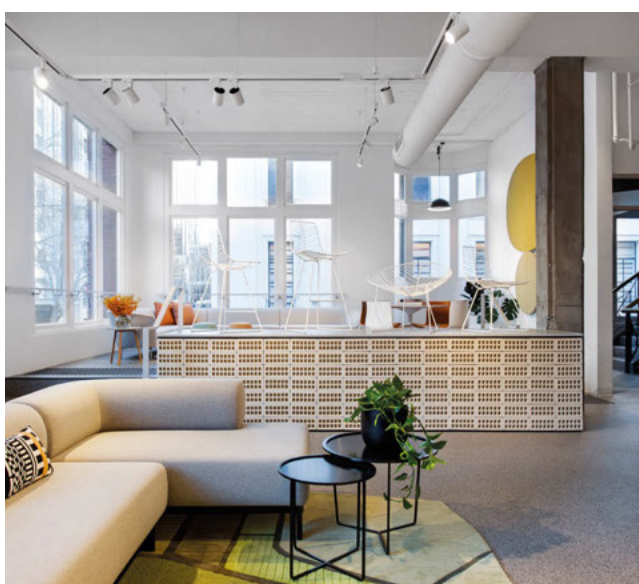


La serie Perfetto é sinonimo di versatilità: un design, molteplici applicazioni. I proiettori possono essere personalizzati con una serie di accessori ottici per un miglior comfort visivo.

The Perfetto range is synonymous with versatility: one design, multiple applications. The spotlights can be customized with a range of optical accessories for a better visual comfort.


MICROPERFETTO LKM

proiettori / spotlights

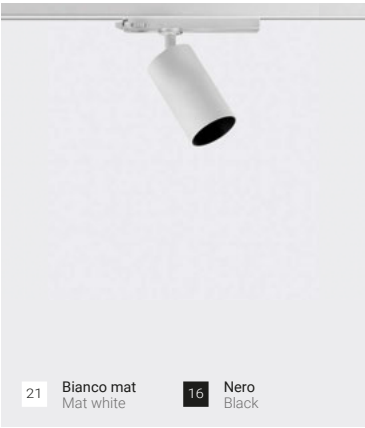


Codice Code	LED Lumen	Product Lumen	Watt	Colour T (K)	CRI	Fascio Beam
Per binari elettrificati trifase LKM / For LKM 3-phase electrified tracks						
760-169B	2700	1890	26	3000	90	30°
760-169A	2740	1918	26	4000	90	30°
760-169C	2590	1813	26	2700	90	30°
220/240V — 50/60Hz						

CE 850° IP20 A++ A+ A



0,4 kg



30°

Accessori ottici intercambiabili
Replaceable optical accessories

		28-3901-51 Ottica professionale S Professional optic device S 26W 			28-3902-51 Ottica professionale M Professional optic device M 26W 			28-3903-51 Ottica professionale W Professional optic device W 26W
		28-3903-31 Ottica professionale XW Professional optic device XW 26W 			28-4139-100 Cilindro oro satinato Satinated gold baffle			
		28-4163-30 Frangiluce alveolare Honeycomb			28-4073-61 Vetro sabbiato Frosted glass			