

# Perfetto Compact-S

Studio Tecnico Ivela

Perfetto Compact-S è l'elegante versione a sospensione del proiettore Perfetto Compact. Le ottiche arretrate e lo snoot di serie rendono Perfetto Compact-S ideale per le sue proprietà antiabbaglianti. Progettato con LED COB ad alta efficienza, può essere personalizzato con una serie di accessori per un miglior comfort visivo. Il suo design, dalle linee compatte e pulite, si inserisce facilmente in numerosi contesti dal retail, all'hospitality, al residenziale.

Perfetto Compact-S is the elegant suspended version of Perfetto Compact spotlight. The deeply-recessed optics and the integrated snoot make Perfetto Compact-S ideal for its anti-glare properties. Designed with high efficiency COB LEDs, it can be customized with a range of accessories for a better visual comfort. Its design, featuring compact and clean lines, fits easily into a variety of contexts from retail to hospitality, to the residential.

## Materiali:

- Corpo e rosone in pressofusione di alluminio verniciato poliester
- Basetta di fissaggio al soffitto in materiale termoplastico
- Ottiche professionali in termoplastico metallizzato a specchio
- Cilindro antiabbagliante interno in termoplastico nero
- Cavo di sospensione in tessuto nero, lunghezza 2mt


## Materials:

- Body and canopy in die-cast aluminum polyester painted
- Ceiling fixing base in thermoplastic material
- Professional optics in mirror metallized thermoplastic material
- Inner anti-glare snoot in black thermoplastic material
- Suspension cable in black fabric, 2 mt length




PERFETTO COMPACT - S

sospensioni / pendants

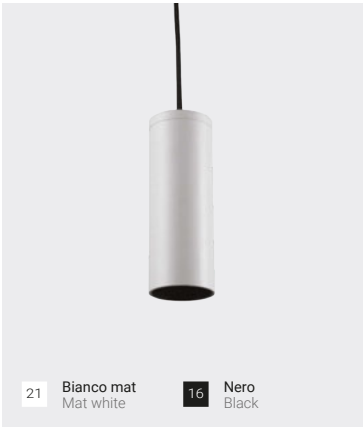


| Codice<br>Code | LED<br>Lumen | Product<br>Lumen | Watt | Colour<br>T (K) | CRI | Fascio<br>Beam |
|----------------|--------------|------------------|------|-----------------|-----|----------------|
| 751-211        | 3125         | 2278             | 26   | 3000            | 85  | 29°            |
| 751-211A       | 3200         | 2333             | 26   | 4000            | 85  | 29°            |

220/240V – 50/60Hz



1,0 kg



29°

Accessori ottici intercambiabili  
Replaceable optical accessories

|  |  |                                                                                                                                                            |  |  |                                                                                                                               |  |  |                                                                                           |
|--|--|------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------------|
|  |  | <b>28-3901-51</b><br>Ottica professionale S<br>Professional optic device S<br><br>26W<br>                                                                  |  |  | <b>28-3902-51</b><br>Ottica professionale M<br>Professional optic device M<br><br>26W<br>                                     |  |  | <b>28-3903-51</b><br>Ottica professionale W<br>Professional optic device W<br><br>26W<br> |
|  |  | <b>28-3903-31</b><br>Ottica professionale XW<br>Professional optic device XW<br><br>26W<br>                                                                |  |  | <b>28-9004-30</b><br>Cilindro antiabbagliamento<br>Snoot                                                                      |  |  |                                                                                           |
|  |  | <b>28-4080-30</b><br>Frangiluce alveolare<br>(da utilizzare insieme a<br>snoot cod. 28-9004-30)<br>Honeycomb<br>(to be used with snoot<br>code 28-9004-30) |  |  | <b>28-3905-47</b><br>Schermo di chiusura in<br>termoplastico trasparente<br>Closing screen in clear<br>thermoplastic material |  |  |                                                                                           |